

PLATFORM | SURFACES

MOLD

Concrete Blend Look Porcelain Tile



Platform Surfaces
330 County Line Rd.
Bensenville, IL 60106
630.526.3399 | platformsurfaces.com



Mist



Cinder




Iron



Nickel

Mold

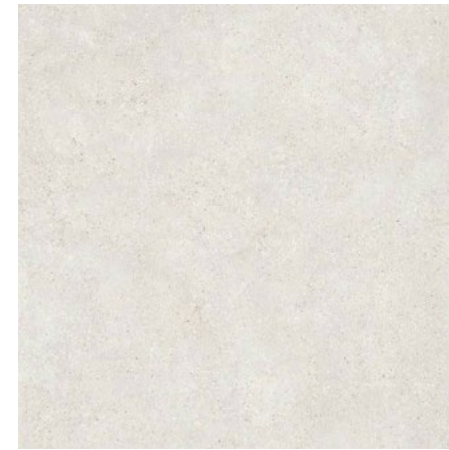

Mist - Rect.
48"x48" 9mm Matte/Soft
24"x48" 9mm Matte/Soft
30"x60" 9mm Matte/Soft
30"x30" 9mm Matte/Soft
24"x24" 9mm Matte/Soft
12"x24" 9mm Matte/Soft



Cinder - Rect.
48"x48" 9mm Matte/Soft
24"x48" 9mm Matte/Soft
30"x60" 9mm Matte/Soft
30"x30" 9mm Matte/Soft
24"x24" 9mm Matte/Soft
12"x24" 9mm Matte/Soft
36"x36" 20mm Outdoor



Iron - Rect.
48"x48" 9mm Matte/Soft
24"x48" 9mm Matte/Soft
30"x60" 9mm Matte/Soft
30"x30" 9mm Matte/Soft
24"x24" 9mm Matte/Soft
12"x24" 9mm Matte/Soft


















Nickel - Rect.
48"x48" 9mm Matte/Soft
24"x48" 9mm Matte/Soft
30"x60" 9mm Matte/Soft
30"x30" 9mm Matte/Soft
24"x24" 9mm Matte/Soft
12"x24" 9mm Matte/Soft

Mold

Packaging

Size	Sq. Ft./Box	Pieces/Box	Boxes/PL
48"x48"	31	2	20
24"x48"	15.50	2	15
30"x60"	12.11	1	25
30"x30"	12.11	2	42
24"x24"	11.63	3	40
12"x24"	13.56	7	40
36"x36" 20mm	8.72	1	18
3"x33" Bullnose	-	10	-
3"x24"	-	10	-

Mold

	Dimensioni/Sizes/Dimensions/ Abmessungen/Afmetingen/ Dimensiones	UNI EN ISO 10545/2	Non rettificato Not rectified	Rettificato Rectified	
	Lunghezza e larghezza/Length and width/Longueur et largeur/Länge und Breite/Lengte en breedte/Longitud y anchura		± 0,6 % max 2mm	± 0,3 % max 1mm	
	Spessore/Thickness/Epaisseur/ Stärke/Dikte/Grosor		± 5 % max 0,5mm	± 5 % max 0,5mm	Conforme Compliant
	Rettilineità spigoli/Linearity/Rectitude des arêtes/ Kantengeradheit/Rechtheid kanten/Rectitud de los lados		± 0,5 % max 1,5mm	± 0,3 % max 0,8mm	
	Ortogonalità/Wedging/Orthogonalité/ Rechtwinkligkei/Haaktheid hoeken/Ortogonalidad		± 0,5 % max 2mm	± 0,3 % max 1,5mm	
	Planarità/Warpage/Planéité/Ebenflächigkeit/ Vlakheid/Planitud		± 0,5 % max 2mm	± 0,4 % max 1,8mm	
	Assorbimento acqua/Water absorption/Absorption d'eau/ Wasseraufnahme/Waterabsorptie/ Absorción de agua	UNI EN ISO 10545/3	0,5 %		0,2%
	Resistenza alla flessione/Flexual Strength/Résistance à la flexion/ Biegefestigkeit/Buigvastheid/ Resistencia a la flexión	UNI EN ISO 10545/4	35 N/mm ²		Conforme Compliant
			S 1300 N (thickness 7,5 mm)		Conforme Compliant
	Coefficiente di restituzione (COR)/ Coefficient of restitution (COR)/ Coefficient de restitution (COR)/ Schlagfestigkeit (COR)/ Restitutiecoëfficiënt (COR)/ Coeficiente de restitución (COR)	UNI EN ISO 10545/5	Valore consigliato 0,55/ Recommended value 0,55/ Valeur recommandée 0,55/ Empfohlener Wert 0,55/ Aanbevolen waarde 0,55/ Ralor recomendado 0,55		Conforme Compliant
	Resistenza all'abrasione profonda/ Deep abrasion resistance/ Resistance à l'abrasion/ Widerstand gegen Tiefenverschleiß/ Weerstand tegen afschuren/ Resistencia a la abrasión profunda	UNI EN ISO 10545/6	175 mm ³		Conforme Compliant
	Coefficiente di dilatazione termica lineare/Coefficient of thermal linear expansion/Coefficient de dilatation thermique linear/Lineare Wärmeausdehnungskoeffizient/ Lineaire thermische uitzetting/ Coeficiente de dilatación termica linear	UNI EN ISO 10545/8	Metodo di prova disponibile/Tests method available/ Methode d'essai disponible/Verfügbares/Prüfverfahren/ Testmethode beschikbaar/Método de prueba disponible		≤ 7 · MK ⁻¹
	Resistenza agli sbalzi termici/ Thermal shock resistance/ Resistance aux écarts de temperature/ Temperaturwechselbeständigkeit/ Temperatuurswisselingen/ Resistencia al choque térmico	UNI EN ISO 10545/9	Nessun campione deve presentare difetti visibili/ No sample must show visible defects/ Aucun échantillon ne doit présenter des défauts visibles/ Kein Exemplar darf sichtbare Schäden aufweisen/ Geen enkel monster mag zichtbare gebreken vertonen/ Ninguna muestra debe presentar defectos visibles		Conforme Compliant
	Dilatazione all'umidità/Moisture expansion/Dilatation à l'humidité/ Feuchtigkeitsausdehnung/ Uitzetting door vocht/Dilatación por la humedad	UNI EN ISO 10545/10	Metodo di prova disponibile/Tests method available/ Methode d'essai disponible/Verfügbares/Prüfverfahren/ Testmethode beschikbaar/Método de prueba disponible		0,01 % (0,1 mm/m)
	Resistenza al fuoco/ Fire resistance/ Résistance au feu/ Brandverhalten/ Brand weerstand/ Resistencia al fuego	UNI EN ISO 13501-1	Dichiarare un valore / Declare a value Classe A1 oppure A ₁₀ / Class A1 or A ₁₀		A1 _{fl}
	Resistenza al gelo/Frost resistance/Résistance au gel/Frostbeständigkeit/ Vorstbestandheid/ Resistencia a la helada	UNI EN ISO 10545/12	Resistenti/Resistant/Resistants/ Widerstandsfähig/ Weerbaarstig/Resistentes		Conforme Compliant

Mold



Resistenza all'attacco chimico/
Chemical resistance/Resistance
à l'attaque chimique/Beständigkeit
gegen Chemikalien/Chemische
bestandheid/Resistencia al ataque
químico

UNI EN ISO
10545/13

Resistenza
ai prodotti
chimici di uso
domestico ed
agli additivi
per piscina /
Resistance
to household
chemicals and
swimming pool
salts

Classe minima B (GB per piastrelle smaltate) / Minimum class B (GB for
glazed tiles)

Conforme
Compliant

Classe minima B (UB per piastrelle non smaltate) /
Minimum class B (UB for unglazed tiles)

Resistenza
a basse
concentrazioni
di acidi e alcali /
Resistance to low
concentrations
of acids and
alkalis

Dichiarare una classe / Declare a class

ULA

Metodo di prova disponibile / Tests method available

Resistenza
ad alte
concentrazioni
di acidi e alcali
/ Resistance
to high
concentrations
of acids and
alkalis

Dichiarare una classe / Declare a class

UHA

Metodo di prova disponibile / Tests method available



Resistenza alle macchie/Stain
resistance/Insensibilité aux
taches/Beständigkeit gegen
Fleckenbildner/Substanzen/
Weerstand tegen vlekken/
Resistencia a las manchas

UNI EN ISO
10545/14

UGL Dichiarare un valore / UGL Declare a value

Vedere interno
See inside



Indicazione di resistenza allo
scivolamento/Assessment
of slip resistance/Indication
de la résistance au glissement/
Bestimmung der Trittsicherheit/
Indicatie voor de slipvastheid/
Indicación de resistencia al
deslizamiento

DIN 51130

Dichiarare un valore (R) / Declae a value (R)

Vedere interno
See inside

DIN 51097

Dichiarare un valore (A+B+C) / Declare a value (A+B+C)

Vedere interno
See inside

BS 7976-2:2002
(CEN/TS 16165,
Annex C)
Pendulum
Friction Test

Dichiarare un valore / Declare a value

Vedere interno
See inside



Coefficiente di attrito dinamico/
Measurement of dynamic
coefficient of friction/
Mesure du coefficient de
frottement dynamique/
Messung des dynamischen
Reibungskoeffizienten/
Meting van de dynamische
wrijvingscoefficient/Coefficiente de
rozamiento dinámico

B.C.R.A. Rep.
CEC/81

Asciutto > 0,40 / Bagnato > 0,40

Vedere interno
See inside

ANSI A137.1-
2012 (BOT3000)

> 0,42 Wet

Vedere interno
See inside

PLATFORM|SURFACES

Platform Surfaces - 330 County Line Rd. Bensenville, IL 60106 - 630.526.3399 - platformsurfaces.com