



Timeless elements

Flake

PLATFORM | SURFACES

Flake

PLATFORM | SURFACES

Timeless elements

- ✂ 9mm
.....
- 24"x24" Soft
- 24"x24" Lappato



The sophistication and charm of traditional Venetian Terrazzo are brought back to life with a contemporary twist in the Flake collection. Venetian Terrazzo, a material resulting from the amalgamation of chips of marble, stones, cement components and natural oxides, is widespread in prestigious residences across the globe, from Venice during the Italian Renaissance to elegant Liberty-style buildings. In Flake, irregular chips of pebbles and marble make up an even pattern packed with details, available in small and medium grain size, in cold and warm hues, favoring contemporary combinations and creative games of volumes and surfaces.


Beige Small/24"x24" Soft - White Small/24"x24" Soft - Beige Medium/24"x24" Soft





Plain Tiles


V2
Slight

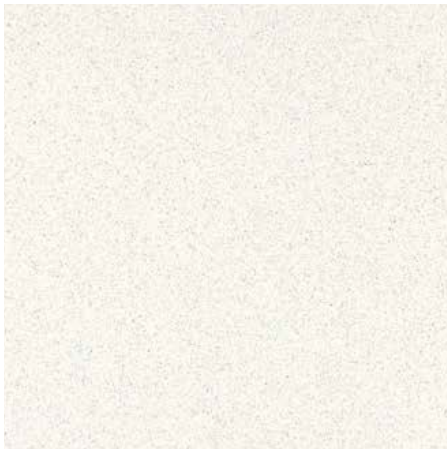


White Small 24"x24" Soft
24"x24" Lappato



White Medium 24"x24" Soft
24"x24" Lappato



White Small




White Medium




Beige Small 24"x24" Soft
24"x24" Lappato



Beige Medium 24"x24" Soft
24"x24" Lappato



Beige Small



Beige Medium

Beige Small/24"x24" Soft



White Medium/24"x24" Lappato - Light Small/24"x24" Lappato





Dark Small/24"x24" Soft – Dark Medium/24"x24" Soft







Light Medium/24"x24" Lappato




Plain Tiles

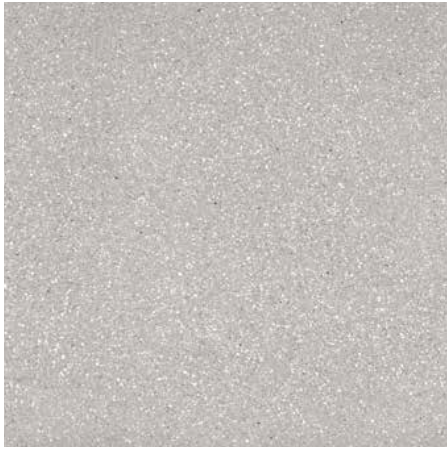


Light Small 24"x24" Soft
24"x24" Lappato

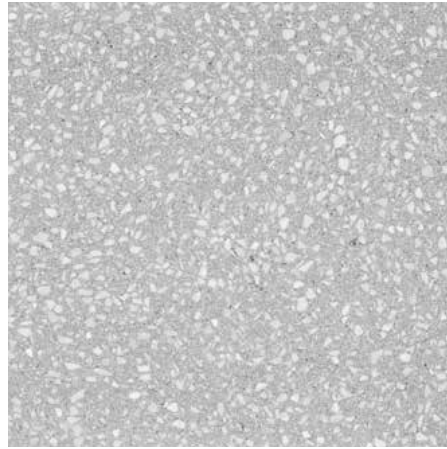


Light Medium 24"x24" Soft
24"x24" Lappato



Light Small




Light Medium

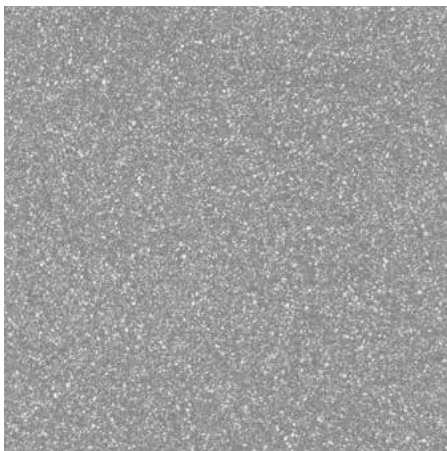


Dark Small 24"x24" Soft
24"x24" Lappato



Dark Medium 24"x24" Soft
24"x24" Lappato




Dark Small



Dark Medium




Black Small 24"x24" Soft
24"x24" Lappato

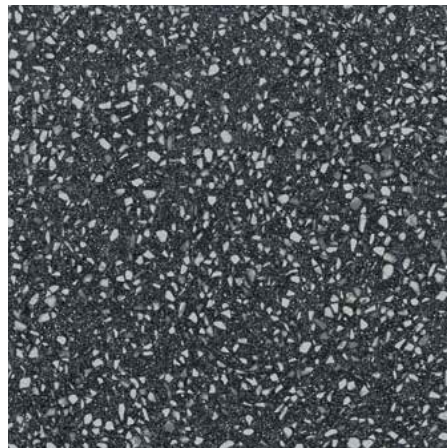

Black Medium 24"x24" Soft
24"x24" Lappato



Black Small



Black Medium

Dark Small/24"x24" Soft



Dark Small/24"x24" Soft




Light Medium/24"x24" Soft





Trim Tiles

Bullnose



2^{7/8}"x24" Soft

Beige Medium
Black Medium
Dark Medium
Light Medium
White Medium

2^{7/8}"x24" Soft

Beige Small
Black Small
Dark Small
Light Small
White Small

2^{7/8}"x24" Lappato

Beige Medium
Black Medium
Dark Medium
Light Medium
White Medium

2^{7/8}"x24" Lappato

Beige Small
Black Small
Dark Small
Light Small
White Small

Packaging

	pcs box	sqft box	lbs box	box pallet	sqft pallet	lbs pallet
24"x24"	3	11.63	47.06	40	465.2	1882.75
2 ^{7/8} "x24" Bullnose	10	19.69	19.84	70	1378.3	1388.91

The SOFT finishes are recommended for interior floors, walls, and exterior walls in both residential and commercial applications. Flake is not recommended for exterior horizontal surfaces or exterior paving, and they are not recommended for ramps application.

The SOFT finish is not recommended for interior floors in entrance areas if joined to outdoor in commercial applications. Flake LAPPATO is recommended for interior walls and exterior walls in both residential and commercial applications. Flake LAPPATO finish is not recommended for floors.

Soft Features



UNI EN ISO 10545/14

Class 5



ANSI A137.1-2012 (BOT3000)











> 0.42 Wet

The slight chromatic variation and the veining of the product is an intrinsic feature to recreate the randomness and richness of the color shading of natural stones to which the collection is inspired. For these reasons, we recommend installing the product choosing tiles from different boxes in order to guarantee a variable and natural random effect of the finished surface. Due to these intrinsic features of the product, the colors represented in this catalogue must only be considered an example of the many possible color shades.

White Medium/24"x24" Lappato



Legend

Regulation		Required standards		Value	
	Sizes	UNI EN ISO 10545/2	Not rectified	Rectified*	
			→ Length and Width	±0.6% max 2mm	±0.3% max 1mm
			→ Thickness	±5% max 0.5mm	±5% max 0.5mm
			→ Linearity	±0.5% max 1.5mm	±0.3% max 0.8mm
			→ Wedging	±0.5% max 2mm	±0.3% max 1.5mm
			→ Warpage	±0.5% max 2mm	±0.4% max 1.8mm
		*According to ISO 13006			Compliant
	Water Absorption	UNI EN ISO 10545/3	≤ 0.5%	≤ 0.2%	
	Flexural Strength	UNI EN ISO 10545/4	35 N/mm ²	Compliant	
			S ≥ 1300 N (thickness ≥ 7.5mm)	Compliant	
	Coefficient of restitution	UNI EN ISO 10545/5	Recommended value ≥ 0.55	Compliant	
	Deep Abrasion Resistance	UNI EN ISO 10545/6	≤ 175 mm ³	Compliant	
	Coefficient of thermal linear expansion	UNI EN ISO 10545/8	Tests method available	≤ 7 MK ⁻¹	
	Thermal Shock Resistance	UNI EN ISO 10545/9	No sample must show visible defects	Compliant	
	Moisture Expansion	UNI EN ISO 10545/10	Tests method available	≤ 0.01 % (0.1 mm/m)	
	Fire Resistance	UNI EN ISO 13501-1	Declare a value Class A1 or A1 _{fl}	A1 _{fl}	
	Frost Resistance	UNI EN ISO 10545/12	Resistant	Compliant	

Legend

	Regulation	Required standards	Value	
	Chemical Resistance	UNI EN ISO 10545/13	Minimum class B (GB for glazed tiles)	
		Resistance to household chemicals and swimming pool salts	Minimum class B (GB for glazed tiles) Minimum class B (UB for unglazed tiles)	A
		Resistance to low concentrations of acids and alkalis	Declare a class Tests method available	LA
		Resistance to high concentrations of acids and alkalis	Declare a class Tests method available	HA Non valid for Lucido and Lappato finishes.
	Stain Resistance	UNI EN ISO 10545/14	UGL Declare a value	
		GL ≥ 3	See Inside	
	Lead and cadmium discharge	UNI EN ISO 10545/15	Declared value for GL tiles	
	Measurement of dynamic coefficient of friction	ANSI A 137.1-2012 (BOT3000)	> 0.42 Wet	



PLATFORM | SURFACES

330 County Line Road
Bensenville, IL 60106
info@platformsurfaces.com
630.526.3399 | platformsurfaces.com