


COASTAL

RETREAT

COLLECTION

beacon



atlas concorde
USA



BEACON

Beacon Salt 7⁵/₈"x39³/₈" - 20x100 cm
Beacon Salt Bullnose 2.5"x 20" - 6.2x50 cm



THE SOOTHING WARMTH OF WOOD

All the warmth and comfort of wood is bestowed in our Beacon Collection, designed to bring **A SENSE OF TRANQUILITY AND UNREFINED BEAUTY** to any room.

Inspired by **CONSUMED AND PAINTED OAK WOOD PLANKS** with slightly visible knots and cracks. Natural beauty with a cozy feeling created by its **CHROMATIC SHADES AND THE CALMING MOTION OF THE GRAPHIC SURFACES.**

Each plank recalls and conveys the soft, wood look typical of coastal homes.

Beacon is available in four neutral tones that have been mindfully selected to harmonize with the coastal theme.



- **INSPIRED BY CONSUMED AND PAINTED OAK WOOD PLANKS**
- **SLIGHTLY VISIBLE KNOTS AND CRACKS**
- **CALMING MOTION IN THE GRAPHIC SURFACES**
- **NEUTRAL TONES PERFECT FOR THE COASTAL STYLE**

COLORS



Salt



Wharf




Gulf



Drift

COLORED BODY PORCELAIN TILE

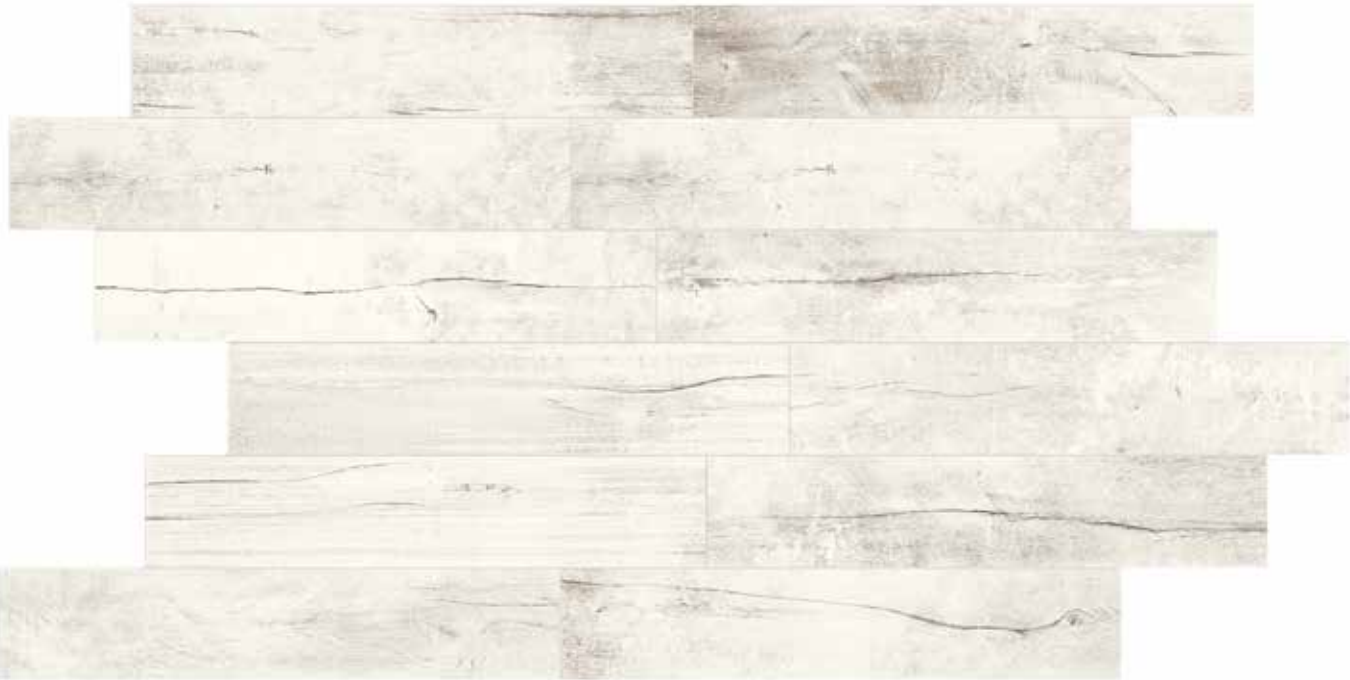

Salt



Wharf



Gulf



Drift



BEACON

Beacon Salt 7⁶/₈"x39³/₈" - 20x100 cm



BEACON

Beacon Drift 7⁶/₈"x39³/₈" - 20x100cm



BEACON

Beacon Wharf 7⁵/₈" x 39³/₈" - 20x100 cm
Beacon Wharf Bullnose 2.5" x 20" - 6.2x50 cm

COVE

Cove Artisan Cold 7⁷/₈" x 7⁷/₈" - 20x20 cm



COLORED BODY PORCELAIN TILE



BEACON

Beacon Gulf 7^{5/8}" x 39^{3/8}" - 20x100 cm

COVE

Cove Breeze 11^{3/4}" x 23^{5/8}" - 30x60 cm

Cove Storm 11^{3/4}" x 23^{5/8}" - 30x60 cm



SIZE - THICKNESS | 7⁶/₈" x 39³/₈" - 20x100 cm ✂ 9 mm FINISH | MATTE



BEACON Salt
7⁶/₈" x 39³/₈" - 20x100 cm
610010002265



BEACON Wharf
7⁶/₈" x 39³/₈" - 20x100 cm
610010002266







BEACON Gulf
7⁶/₈" x 39³/₈" - 20x100 cm
610010002267




BEACON Drift
7⁶/₈" x 39³/₈" - 20x100 cm
610010002268



COORDINATING TRIMS

	Bullnose
 BEACON Salt	610130004023
 BEACON Wharf	610130004024
 BEACON Gulf	610130004025
 BEACON Drift	610130004026



Bullnose
2.5" x 20" - 6.2x50 cm

BEACON

Beacon Gulf 7⁶/₈" x 39³/₈" - 20x100 cm

COVE

Cove Storm 11³/₄" x 23⁵/₈" - 30x60 cm

COLORED BODY PORCELAIN TILE



Compliant with standards ANSI A137.1-2012

SIZE - THICKNESS

7^{5/8}" x 39^{3/8}" - 20x100 cm

± 9 mm

FINISH

MATTE



V2

SLIGHT VARIATION

While the colors and/or texture present on a single piece of tile will be indicative of the colors and/or texture to be expected on the other tiles, the amount of colors and/or texture on each piece may vary significantly. It is recommended that the range be viewed before selection.

FIELD TILES - Available in all colors

Commercial size (in)	Nominal size (in)	Thickness (mm)	Finish
8"x40"	7 6/8" x 39 3/8"	9 mm	Matte

MOSAICS AND COORDINATING TRIMS - Available in all colors

Commercial size (in)	Nominal size (in)	Thickness (mm)	Finish
Bullnose 2.5"x20"	2 7/8" x 19 5/8"	9 mm	Matte

Please refer to caliber chart for work sizes. Close joints are not recommended.

PERFORMANCE & FEATURES

PROPERTY	ASTM TEST METHOD	Porcelain Tile Specification				BEACON			
		Calibrated		Rectified					
		Minimum	Maximum	Minimum	Maximum				
REGULARITY CHARACTERISTICS	Nominal Size	ASTM C499	-3.00%	3.00%	-3.00%	2.00%	Compliant		
			Caliber Range (Variation from average facial dimension of sample)	-0.50% or -0.08 in (-2.0 mm) (*)	0.50% or 0.08 in (2.0 mm) (*)	-0.25% or -0.03 in (-0.8 mm) (*)	0.25% or 0.03 in (0.8 mm) (*)	Compliant	
			Thickness (1)	N/A	Range: 0.40 in (1.02 mm)	N/A	Range: 0.40 in (1.02 mm)	Compliant	
	Warpage Edge	ASTM C485	-0.50% or -0.08 in (-2.0 mm) (*)	0.50% or 0.08 in (2.0 mm) (*)	-0.25% or -0.03 in (-0.8 mm) (*)	0.25% or 0.03 in (0.8 mm) (*)	Compliant		
			Wedgeing	ASTM C502	-0.75% or -0.09 in (-2.3 mm) (*)	0.75% or 0.09 in (2.3 mm) (*)	-0.40% or -0.05 in (-1.3 mm) ⁽²⁾ or -1.8 mm ⁽³⁾ (*)	0.40% or 0.05 in (1.3 mm) ⁽²⁾ or 1.8 mm ⁽³⁾ (*)	Compliant
			Warpage Diagonal	-0.50% or -0.08 in (-2.0 mm) (*)	0.50% or 0.08 in (2.0 mm) (*)	-0.40% or -0.07 in (-1.8 mm) (*)	0.40% or 0.07 in (1.8 mm) (*)	Compliant	
All Porcelain Tiles									
STRUCTURAL CHARACTERISTICS	Water Absorption	ASTM C373	≤ 0.5%			≤ 0.5%			
BULK MECHANICAL CHARACTERISTICS	Breaking Strength	ASTM C648	Average ≥ 250 lbf. (1.11 kN) Individual ≥ 225 lbf. (1.00 kN)			≥ 350 lbf. avg			
PHYSICAL PROPERTIES	Bond Strength	ASTM C482	≥ 50 psi (0.34 Mpa)			≥ 100 psi			
THERMAL AND IGROMETRIC CHARACTERISTICS	Resistance to Freeze/Thaw Cycling	ASTM C1026	As Reported			Resistant			
CHEMICAL CHARACTERISTICS	Chemical Resistance	ASTM C650	As Reported			Unaffected			
	Stain Resistance	ASTM C1378	As Reported			Unaffected			
SAFETY CHARACTERISTICS	Dynamic coefficient of friction	DCOF	Requires a minimum value of 0.42 for commercial areas that are likely to be wet			> 0.42 Wet			

(*) Whichever is less
 (1) May not apply to textured surfaces or tiles with uneven back patterns.
 (2) Whichever is less, for tiles up to 24"x24" (610 mm x 610 mm).
 (3) Applies to tiles larger than 24"x24" (610 mm x 610 mm).

The Health Product Declaration® logo is a registered trademark of HPD Collaborative.



Atlas Concorde reserves the right to modify any product without notice and will not be liable for any direct or indirect damage resulting from such modifications. Colors and optical features of the materials illustrated in this catalogue are to be regarded as mere indications. For information and details relating to codes, packaging and details it is recommended to refer to the latest pricelist.

© Copyright Atlas Concorde USA, Inc. 2019
 The reproduction of the work, fully or in part, is strictly forbidden.