PLATFORM | SURFACES

PORCELAIN TILE


MicroForm

The MicroForm collection is crafted from true through-body porcelain with no glazing or digital decoration, offering exceptional durability and lasting visual consistency. A palette of six neutral tones, four versatile formats, and three distinct finishes creates compositions that feel balanced, purposeful, and highly adaptable. Minimal in expression yet rich in design potential, MicroForm provides a refined framework for shaping modern spaces.





Extra White

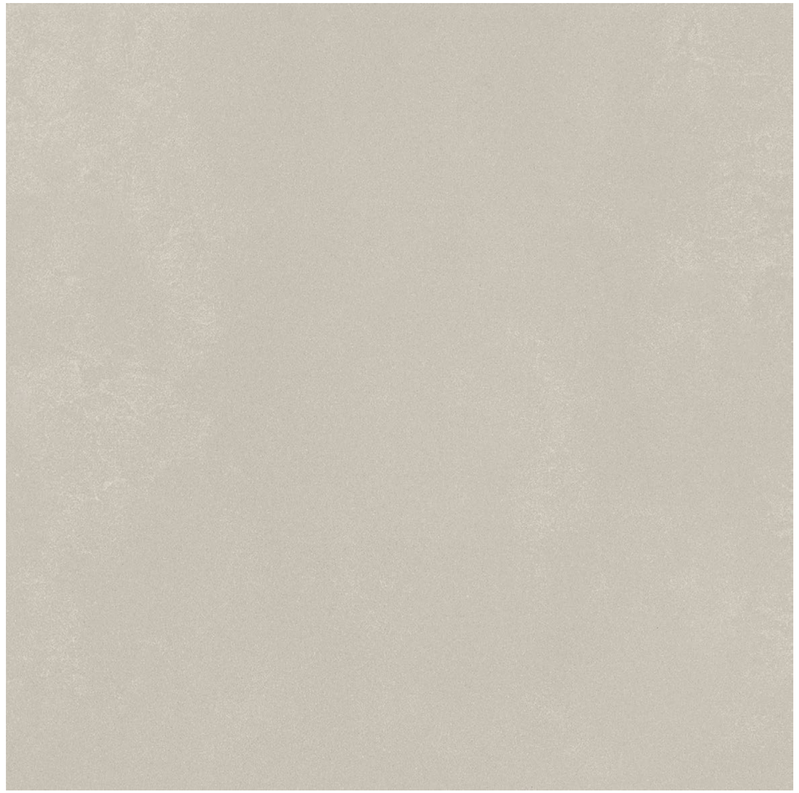




Extra White 48"x48" | Natural



Extra White 48"x48" | Natural



Almond

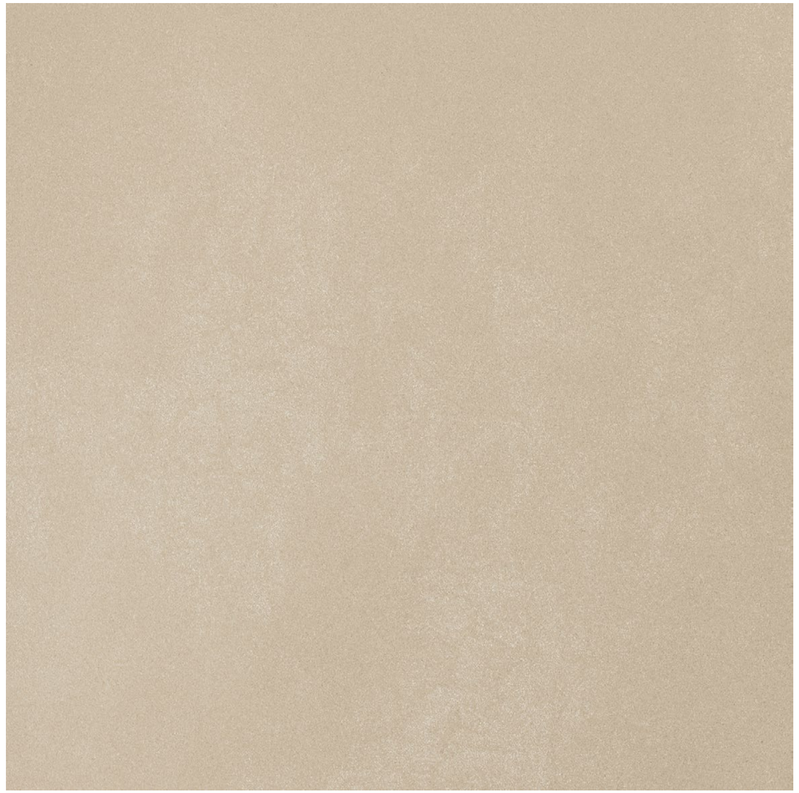




Almond 48"x48" | Polished



Almond 48"x48" | Polished



Beige

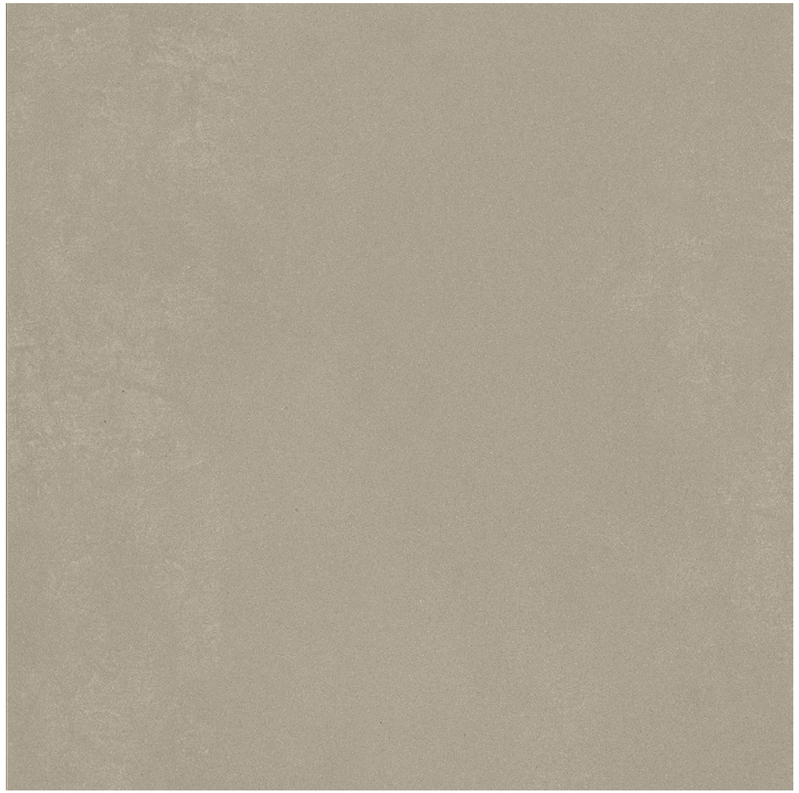




Beige 48"x48" | Natural



Beige 48"x48" | Natural



Silver

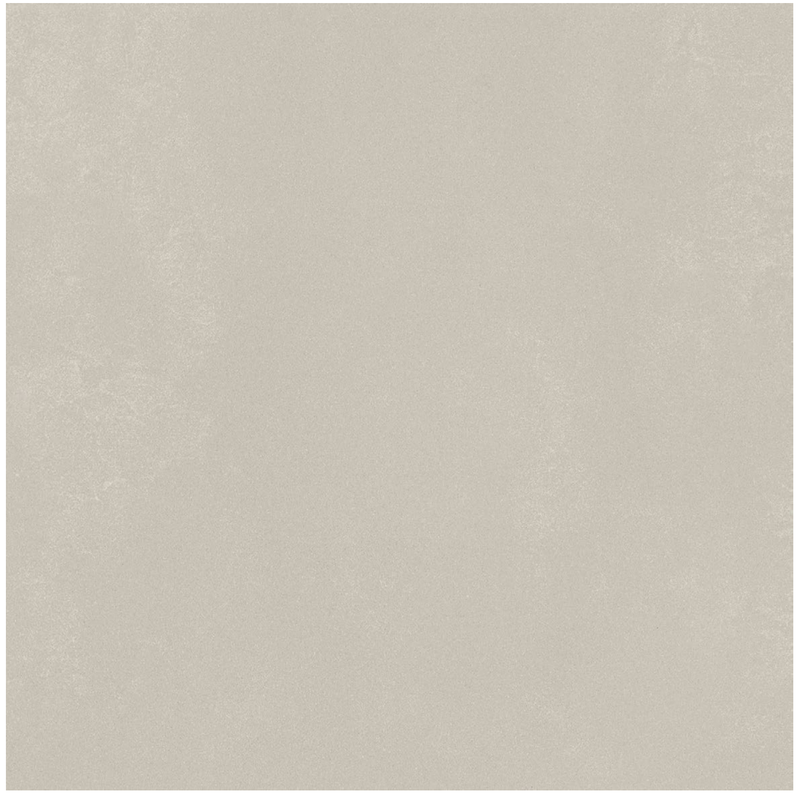




Silver 24"x24" | Natural



Silver 24"x24" | Natural



Medium Grey

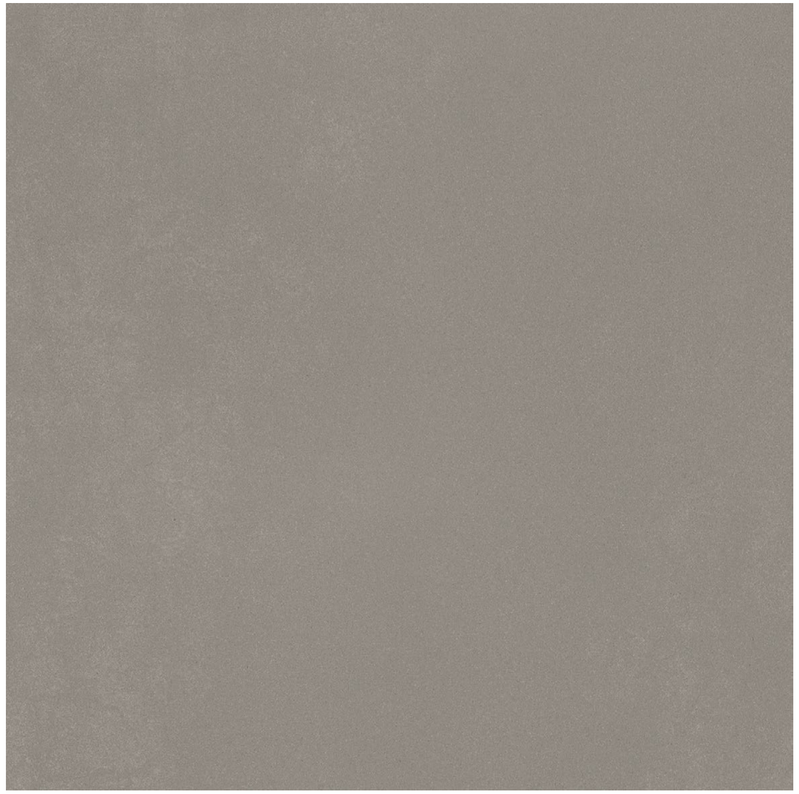



Medium Grey 48"x48" | Natural



Medium Grey 48"x48" | Natural



Dark Grey





Dark Grey 48"x48" | Polished




Dark Grey 48"x48" | Polished

MicroForm


Extra White




Almond

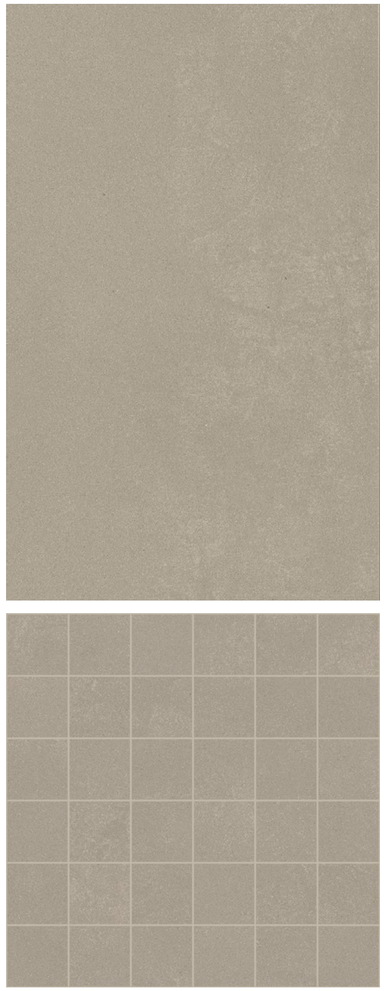

Beige

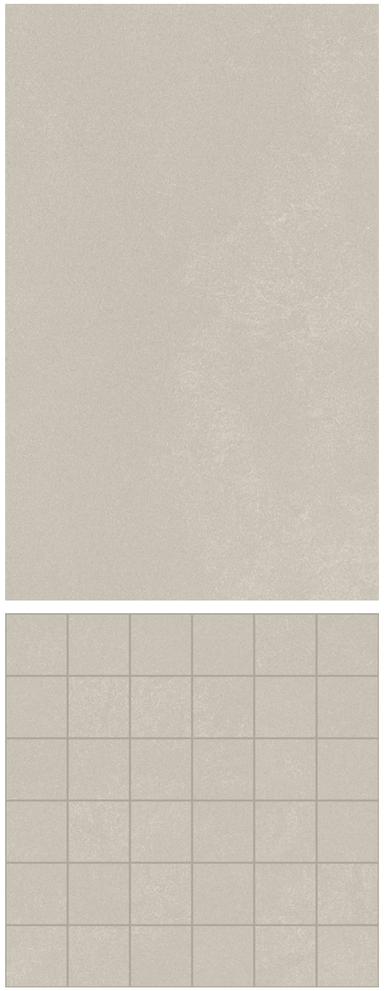

Silver

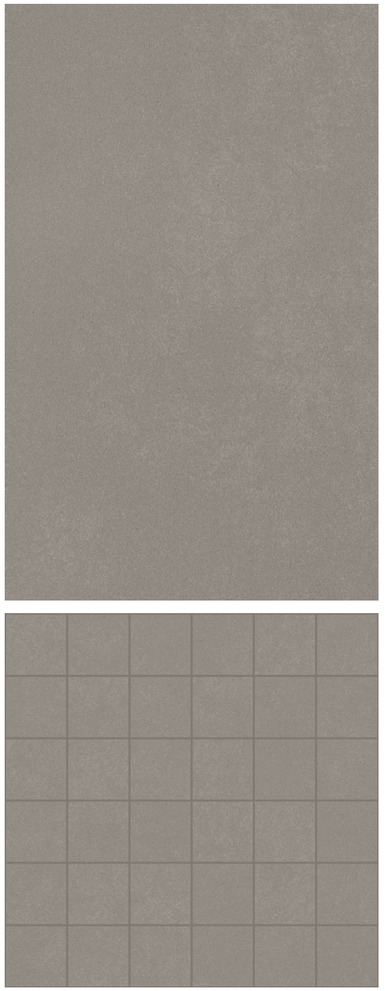


Medium Grey




Dark Grey


MicroForm




48"x48" Rectified
Thickness: 10mm
Natural/Polished/Grip




24"x48" Rectified
Thickness: 10mm
Natural/Polished



2"x2" Square Mosaic
(12"x12" Sheet)
Thickness: 10mm
Natural




2.4"x48" Bullnose Trim
2.4"x24" Bullnose Trim
Thickness: 10mm
Natural/Polished



24"x24" Rectified
Thickness: 10mm
Natural/Grip



12"x24" Rectified
Thickness: 10mm
Natural



12.8"x48" Stair Tread
Thickness: 10mm
Natural

Packaging

48"x48"	15.50 SF/Carton
24"x48"	15.50 SF/Carton
24"x24"	11.63 SF/Carton
12"x24"	11.63 SF/Carton

Please reach out to your Platform Surfaces representative for additional technical documentation (maintenance and warranty data, LEED submittal documents including EPD, HPD, GreenGuard Certification, etc.).

MicroForm

Material	Porcelain
Finish	Natural, Polished, Grip
Sizes	(See page 15)
Thickness	10mm
Shade Variation	V2 (Slight; Subtle Differences)
DCOF	> 0.42 (Natural, Grip); (ANSI A326.3)
Edge	Rectified
Country of Origin	Italy
Domestic Stock	No
Recycled Content	N/A

Recommended Grout Joint	1/8"
Packaging	(See page 15)
Water Absorption	< 0.1% (ISO 10545-3)
Breaking Strength	3000 N (ISO 10545-4)
Thermal Shock Resistance	Resistant (ISO 10545-9)
Frost Resistance	Resistant (ISO 10545-12)
Chemical Resistance	From LA, LB to LC (Low Con. Acids/Alkalis); (ISO 10545-13)
Stain Resistance	≥ Class 3 (GL); (ISO 10545-14)
Crazing Resistance	N/A
Scratch Hardness	N/A

Application

Exterior Floors	Exterior Walls	Interior Floors Dry	Interior Floors Wet	Interior Walls Dry	Interior Walls Wet	Shower Floors	Shower Walls	Pools	Counters	Residential	Commercial
✔ Grip Finish Only	✔	✔	✔	✔	✔	✔	✔	✔		✔	✔



PLATFORM | SURFACES

Chicago
330 County Line Rd
Bensenville, IL 60106
Tel: 630.526.3399

Minneapolis
1720 Annapolis Ln N
Plymouth, MN 55441
Tel: 763.551.5900

platformsurfaces.com
info@platformsurfaces.com